


Series Safag



Elastomer bellow unbalanced mechanical seal Independent of the shaft rotating direction

D1	D3	L2	D7	L3	L1k
6	18	8.5±0.5	22	4	12.5
8	18	8.5±0.5	22	4	12.5
8	18	11±0.5	22	4	15
8	24	11	26	5.5/8	16.5/19
9	24	11	26	5.5/8	16.5/19
10	24	11	26	5.5/8	16.5/19
11	24	11	26	5.5/8	16.5/19
12	24	13	26	5.5/8	18.5/21
13	24	13	26	5.5/8	18.5/21
12	32	13	29.5/38	8	21
14	28	12.8	29.5/38	7.5	20.5
14	32	13	29.5/38	8	21
15	32	13	29.5/38	8	21
16	32	13	29.5/38	8	21
14	35	13	29.5/38	8	21
15	35	13	29.5/38	8	21
16	35	13	29.5/38	8	21
16	39	13	42	8	21
17	39	13	42	8	21
18	39	13	42	8	21
19	39	13	42	8	21
20	39	13	42	8	21
20	42	13	45	10	23
22	42	13	45	10	23
24	47	14	50	10	24
25	42	14	45	10	24
25	47	14	50	10	24
28	54	15	57	10	25
30	54	15	57	10	25
32	54	15	57	10	25
35	60	16	63	10	26
38	65	18	68	12	30
40	65	18	68	12	30
45	70	20	73	12	32
50	85	23	88	15	38
55	85	23	88	15	38
60	105	30	110	15	45
70	105	32	110	15	47

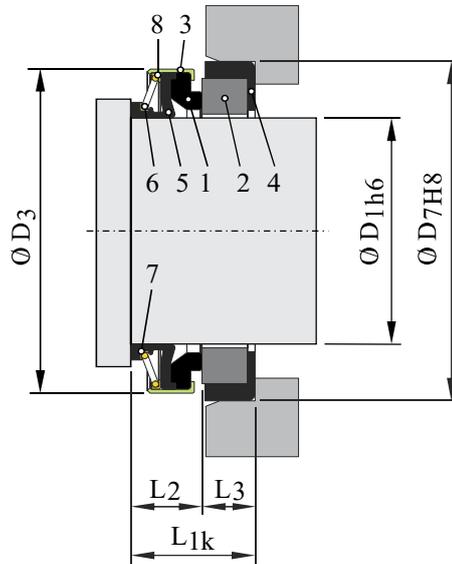

Item	Description
1.	Rotary seal ring
2.	Stationary seat
3.	Housing
4.	Secondary seal
5.	Secondary seal
6.	Spring
7.	Collar
8.	Retainer

APPLICATION



Agriculture



Water treatment



Food industry

LIMITING FACTORS

D1= 6... 70 mm
 p1= 6bar
 t= -30...+204°C
 Vg= 20 m/s