


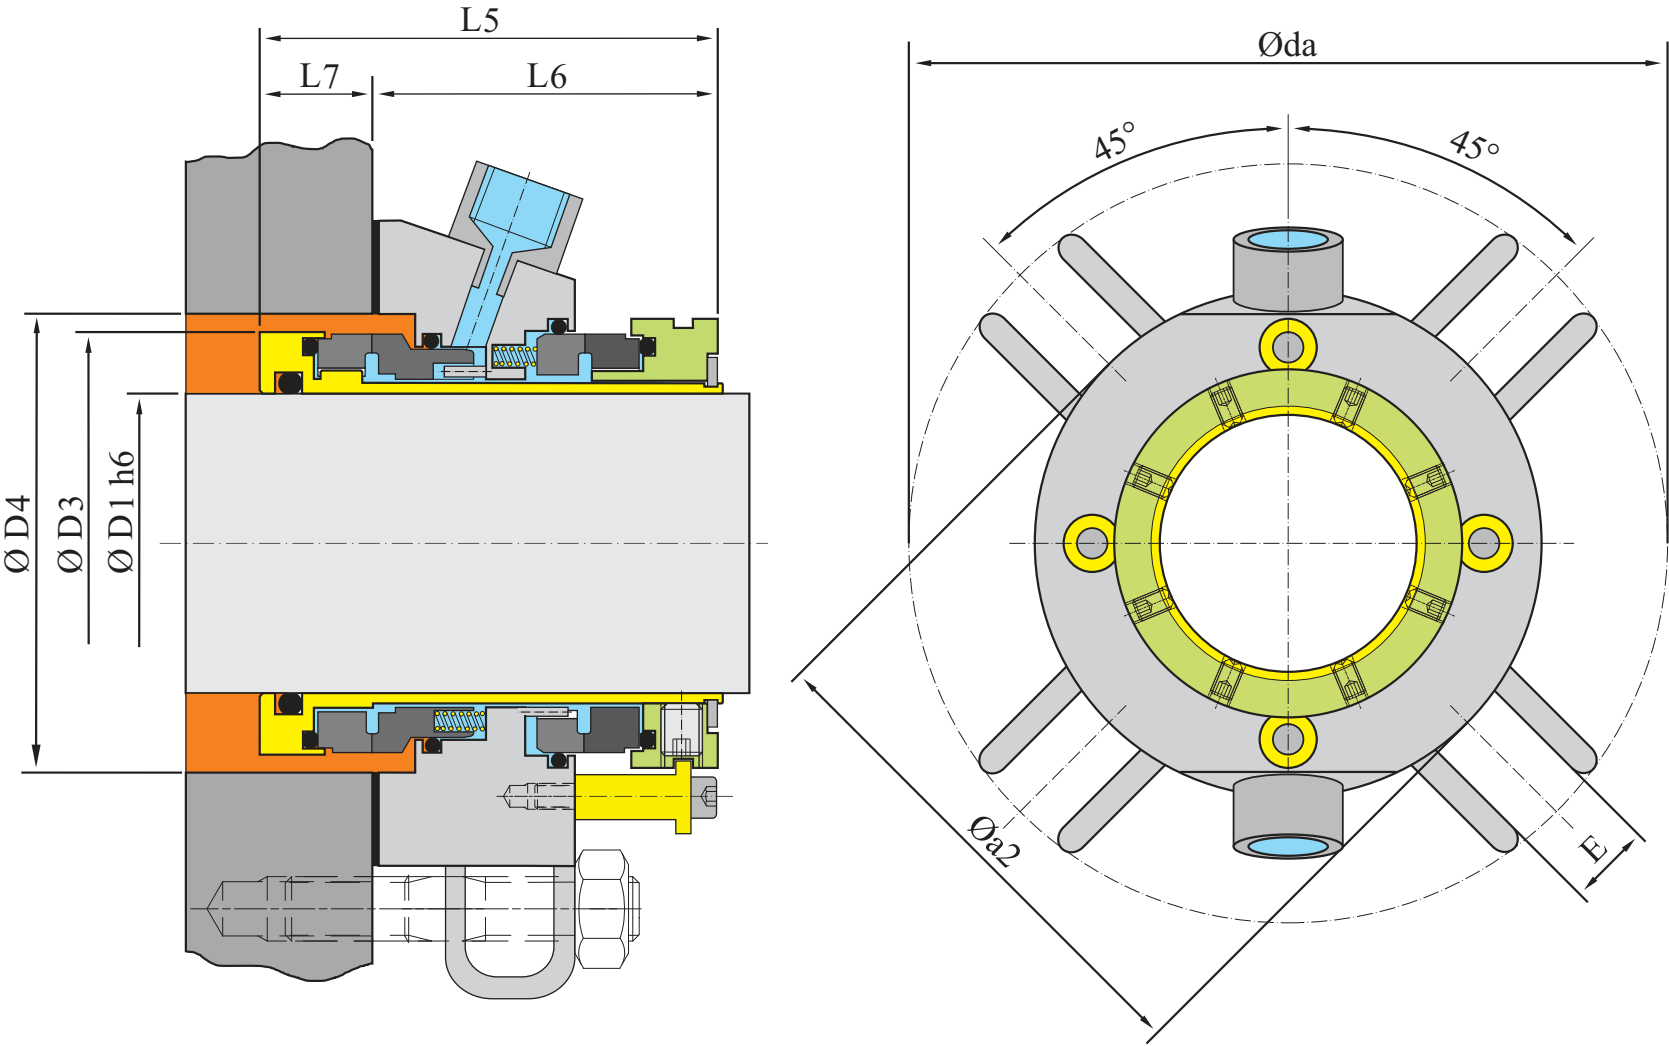

- 17D.4.2.1-Flushing connection G 1/8"

17D.4.2.2-Flushing connection G 1/4"

17D.4.2.3-Flushing connection G 3/8"

D1	D3	D4 min.	D4 max.	L5	L6	L7	Øa2	Øda	E	ØS
25	41.9	44.0	51.0	75.4	52.8	22.6	62.0	105.0	16.0	13.2
28	44.4	47.0	52.0	75.4	52.8	22.6	61.0	105.0	16.0	13.2
30	47.0	49.0	56.0	75.4	52.8	22.6	67.0	105.0	16.0	13.2
32	49.7	51.0	57.0	75.4	52.8	22.6	70.0	110.0	16.0	13.2
33	49.7	51.0	57.0	75.4	52.8	22.6	70.0	110.0	16.0	13.2
35	54.5	56.5	61.5	76.8	53.4	23.4	72.0	113.0	16.0	13.2
38	56.0	57.0	66.0	77.6	54.0	23.6	75.0	123.0	16.0	13.2
40	58.0	59.0	68.0	79.6	54.3	25.3	77.0	123.0	16.0	14.2
42	60.5	61.5	69.5	79.6	54.3	25.3	80.0	133.0	16.0	14.2
43	60.5	61.5	70.5	79.6	54.3	25.3	80.0	133.0	16.0	14.2
45	62.5	64.0	73.0	79.6	54.3	25.3	82.0	138.0	16.0	14.2
48	67.0	68.0	75.0	80.5	54.0	26.5	85.0	138.0	16.0	14.2
50	68.5	69.0	78.0	80.5	54.0	26.5	87.0	148.0	16.0	14.2
53	72.0	73.0	87.0	82.5	54.0	28.5	97.0	148.0	18.0	18.0
55	74.0	75.0	83.0	82.5	54.0	28.5	92.0	148.0	18.0	18.0
60	78.9	80.5	91.0	82.5	54.0	28.5	102.0	157.0	18.0	18.0
65	84.8	85.7	98.5	82.5	54.0	28.5	109.0	163.0	18.0	18.0
70	93.0	95.0	108.0	82.6	54.0	28.6	118.0	178.0	18.0	18.0
75	98.0	101.6	118.0	82.6	54.0	28.6	129.0	190.0	18.0	18.0
80	104.0	108.0	124.0	87.8	59.3	28.5	135.0	195.0	18.0	18.0
85	109.0	111.1	128.0	87.8	59.3	28.5	139.0	198.0	22.0	22.0
90	114.0	117.5	135.0	87.8	59.3	28.5	145.0	205.0	22.0	22.0
95	119.0	120.7	138.0	87.8	59.3	28.5	148.0	208.0	22.0	22.0
100	124.0	127.0	144.0	87.9	57.4	28.5	154.0	218.0	22.0	22.0