
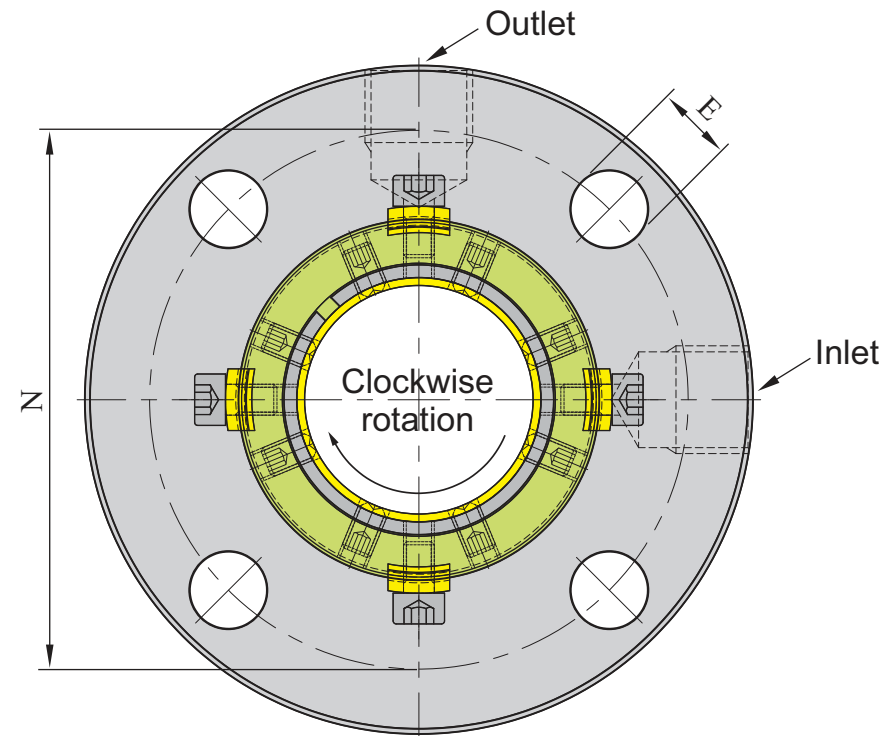


Type Sealtex 17D

Double, modular, balanced, O-ring pusher type cartridge seal

Type Sealtex 17D

Dimension Table (Inches)

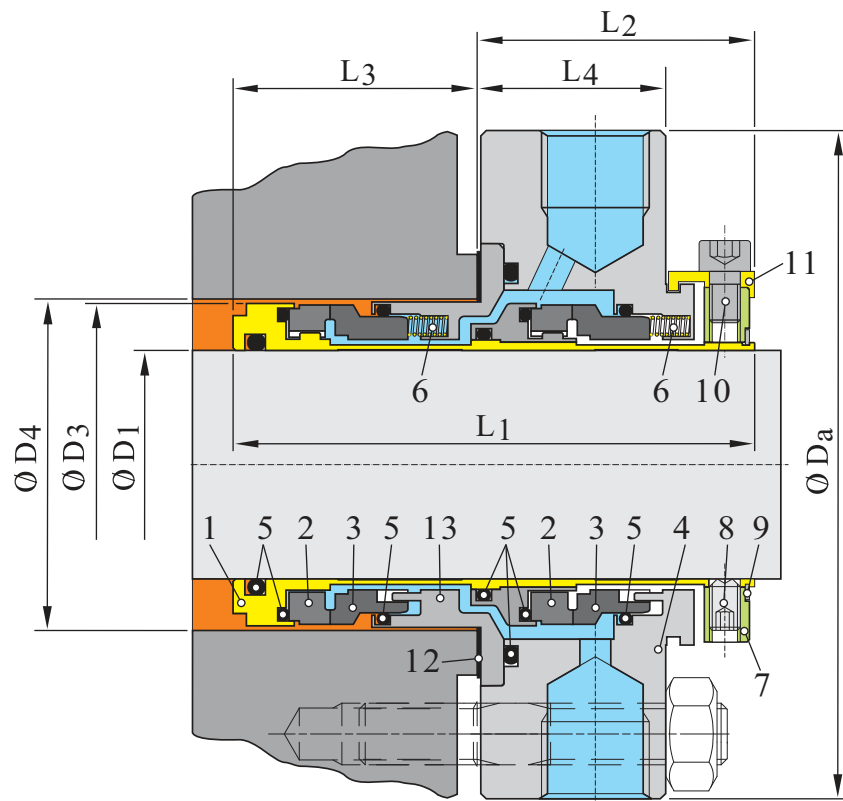

D1	D3	D4 min.	D4 max.	ØDa	L1	L2	L3	L4	E	N
1.000	1.564	1.625	1.889	4.000	3.705	1.954	1.751	0.531	0.525	2.805
1.125	1.689	1.750	2.015	4.125	3.851	2.062	1.789	0.531	0.525	2.933
1.250	1.812	1.875	2.294	4.250	3.851	2.062	1.789	0.531	0.525	3.213
1.375	1.939	2.000	2.421	4.375	3.851	2.062	1.789	0.531	0.525	3.338
1.500	2.187	2.250	2.680	4.875	3.995	2.156	1.870	0.593	0.525	3.599
1.625	2.312	2.375	2.812	5.000	3.995	2.156	1.870	0.593	0.562	3.766
1.750	2.406	2.480	2.918	5.250	3.995	2.156	1.870	0.593	0.562	3.875
1.875	2.549	2.625	2.918	5.250	3.995	2.156	1.870	0.593	0.562	3.875
2.000	2.673	2.750	3.015	5.500	4.355	2.312	2.042	1.063	0.562	4.000
2.125	2.798	2.875	3.360	5.859	4.355	2.313	2.042	0.593	0.687	4.469
2.250	2.923	3.000	3.485	6.500	4.355	2.313	2.042	0.593	0.687	4.566
2.375	3.048	3.125	3.610	6.500	4.545	2.466	2.079	0.625	0.687	4.719
2.500	3.301	3.375	3.891	6.750	4.545	2.563	1.982	0.625	0.687	5.000
2.625	3.551	3.625	4.062	6.750	4.687	2.500	2.094	0.625	0.687	5.170
2.750	3.551	3.625	4.062	6.750	4.687	2.500	2.094	0.625	0.687	5.170
2.875	3.614	3.750	4.186	7.000	4.687	2.500	2.094	0.625	0.687	5.312
3.000	3.846	4.000	4.469	7.750	4.687	2.562	2.032	0.685	0.812	5.720
3.125	4.022	4.125	4.600	7.875	4.687	2.562	2.125	-	0.812	5.845
3.250	4.022	4.134	4.600	7.437	4.687	2.510	2.177	-	0.812	5.845
3.375	4.246	4.375	4.850	8.125	4.687	2.562	2.125	-	0.812	6.095
3.500	4.371	4.500	4.975	8.250	4.687	2.562	2.125	-	0.812	6.220
3.625	4.500	4.625	5.100	8.375	4.687	2.562	2.125	-	0.687	6.250
3.750	4.625	4.724	5.199	8.750	4.687	2.562	2.125	-	0.687	6.770
3.875	4.750	4.875	5.375	8.750	4.687	2.562	2.125	-	0.812	6.636
4.000	4.875	5.000	5.500	9.000	4.687	2.562	2.125	-	0.812	6.761
4.125	5.000	5.125	5.625	9.000	4.687	2.562	2.125	-	0.812	6.886
4.250	5.125	5.250	5.750	9.250	4.687	2.562	2.125	-	0.812	7.011
4.500	5.375	5.500	6.000	9.500	4.687	2.562	2.125	-	0.812	7.261
4.750	5.625	5.750	6.313	10.375	4.687	2.562	2.125	-	0.812	7.574
5.000	6.125	6.250	7.260	12.000	5.515	3.043	2.473	-	0.812	10.000
5.250	6.375	6.760	7.510	12.250	5.515	3.043	2.473	-	0.812	10.250
5.500	6.625	7.010	8.000	12.687	5.515	3.043	2.473	-	0.937	10.500