


Type Sealtex 16D

Single, modular, balanced, O-ring pusher type cartridge seal

Type Sealtex 16D


Dimension Table (Inches)

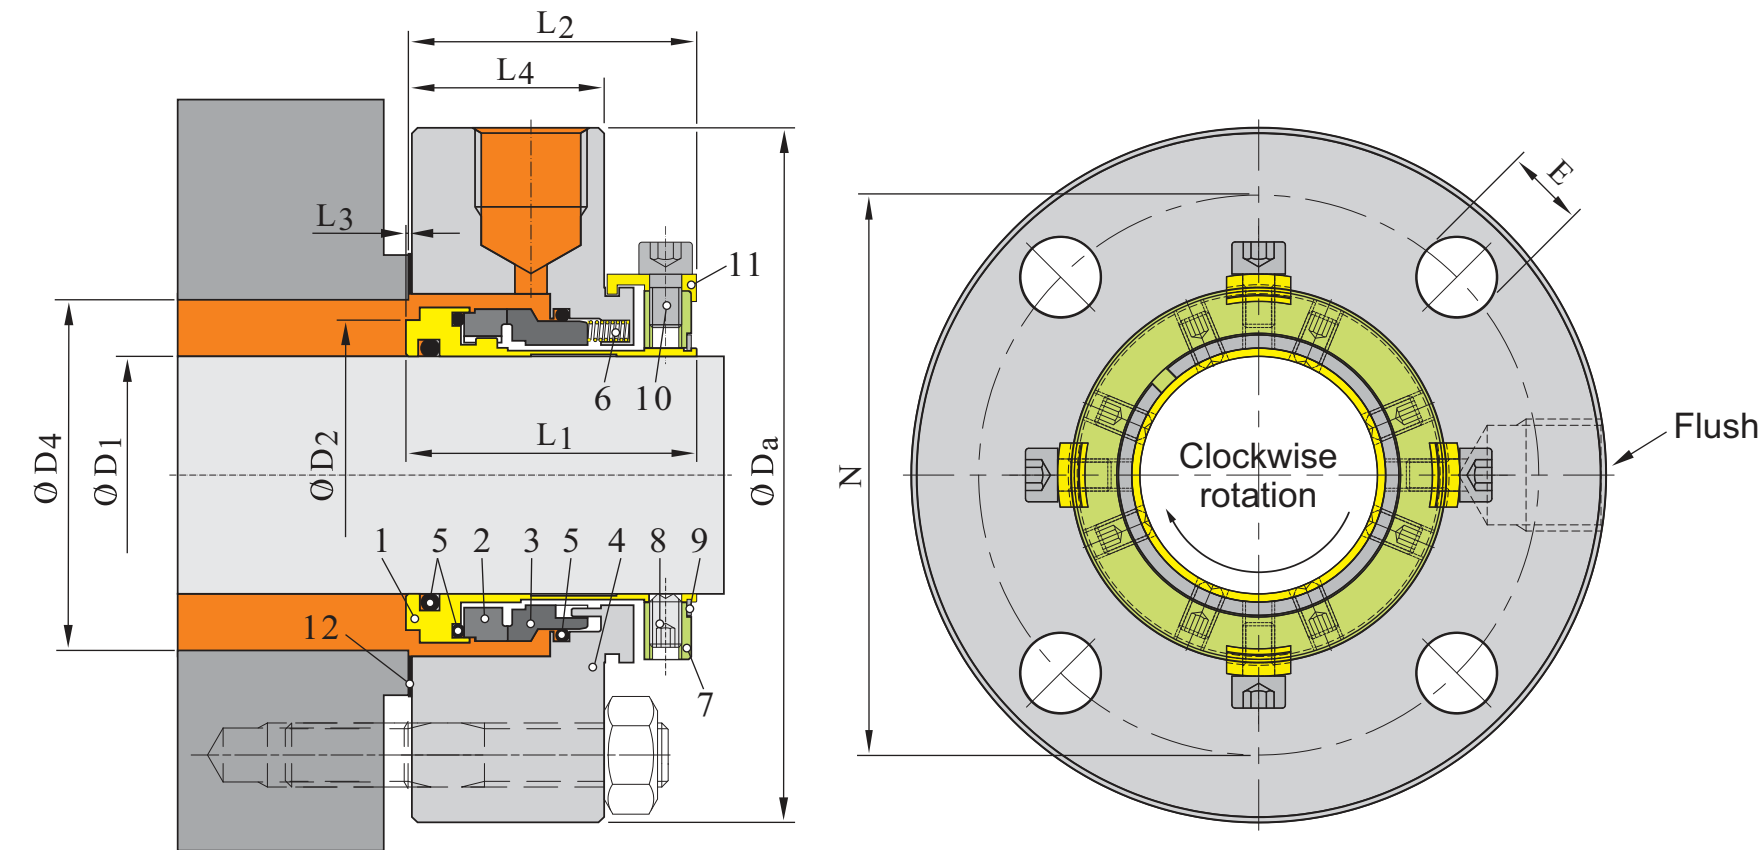

D1	D2	D4 min.	D4 max.	ØDa	L1	L2	L3	L4	E	N
1.000	1.375	1.445	1.889	4.000	1.989	1.954	0.035	0.531	0.525	2.805
1.125	1.500	-	2.015	4.125	2.062	2.062	-	0.531	0.525	2.933
1.250	1.625	-	2.294	4.250	2.062	2.062	-	0.531	0.525	3.213
1.375	1.750	-	2.421	4.375	2.062	2.062	-	0.531	0.525	3.338
1.500	1.937	2.007	2.680	4.875	2.156	2.156	0.031	0.593	0.525	3.599
1.625	2.062	2.132	2.812	5.000	2.156	2.156	0.031	0.593	0.562	3.766
1.750	2.170	2.240	2.918	5.250	2.156	2.156	0.031	0.593	0.562	3.875
1.875	2.312	2.382	2.918	5.250	2.156	2.156	0.031	0.593	0.562	3.875
2.000	2.437	2.507	3.015	5.500	2.375	2.375	0.062	1.063	0.562	4.000
2.125	2.562	2.632	3.360	5.859	2.375	2.375	0.062	0.593	0.687	4.469
2.250	2.687	2.757	3.485	6.500	2.375	2.375	0.062	0.593	0.687	4.566
2.375	2.812	2.882	3.610	6.500	2.484	2.466	0.018	0.625	0.687	4.719
2.500	3.062	-	3.891	6.750	2.484	2.562	-	0.625	0.687	5.000
2.625	3.312	-	4.062	6.750	2.500	2.500	-	0.625	0.687	5.170
2.750	3.312	-	4.062	6.750	2.500	2.500	-	0.625	0.687	5.170
2.875	3.375	-	4.186	7.000	2.500	2.500	-	0.625	0.687	5.312
3.000	3.625	-	4.469	7.750	2.500	2.562	-	0.685	0.812	5.720
3.125	3.750	3.853	4.600	7.875	2.562	2.562	-	-	0.812	5.845
3.250	3.750	3.853	4.600	7.437	2.562	2.510	0.052	-	0.812	5.845
3.375	4.000	4.125	4.850	8.125	2.562	2.562	-	-	0.812	6.095
3.500	4.125	4.250	4.975	8.250	2.562	2.562	-	-	0.812	6.220
3.625	4.218	4.343	5.100	8.375	2.562	2.562	-	-	0.687	6.250
3.750	4.343	4.468	5.199	8.750	2.562	2.562	-	-	0.687	6.770
3.875	4.468	4.593	5.375	8.750	2.562	2.562	-	-	0.812	6.636
4.000	4.593	4.718	5.500	9.000	2.562	2.562	-	-	0.812	6.761
4.125	4.718	4.843	5.625	9.000	2.562	2.562	-	-	0.812	6.886
4.250	4.843	4.968	5.750	9.250	2.562	2.562	-	-	0.812	7.011
4.500	5.093	5.218	6.000	9.500	2.562	2.562	-	-	0.812	7.261
4.750	5.343	5.468	6.313	10.375	2.562	2.562	-	-	0.812	7.574
5.000	5.843	5.968	7.260	12.000	2.953	3.043	-	-	0.812	10.000
5.250	6.093	5.218	7.510	12.250	2.953	3.043	-	-	0.812	10.250
5.500	6.343	5.468	8.000	12.687	2.953	3.043	-	-	0.937	10.500

Type Sealtex 16D

Single, modular, balanced, O-ring pusher type cartridge seal
with graphite bushing

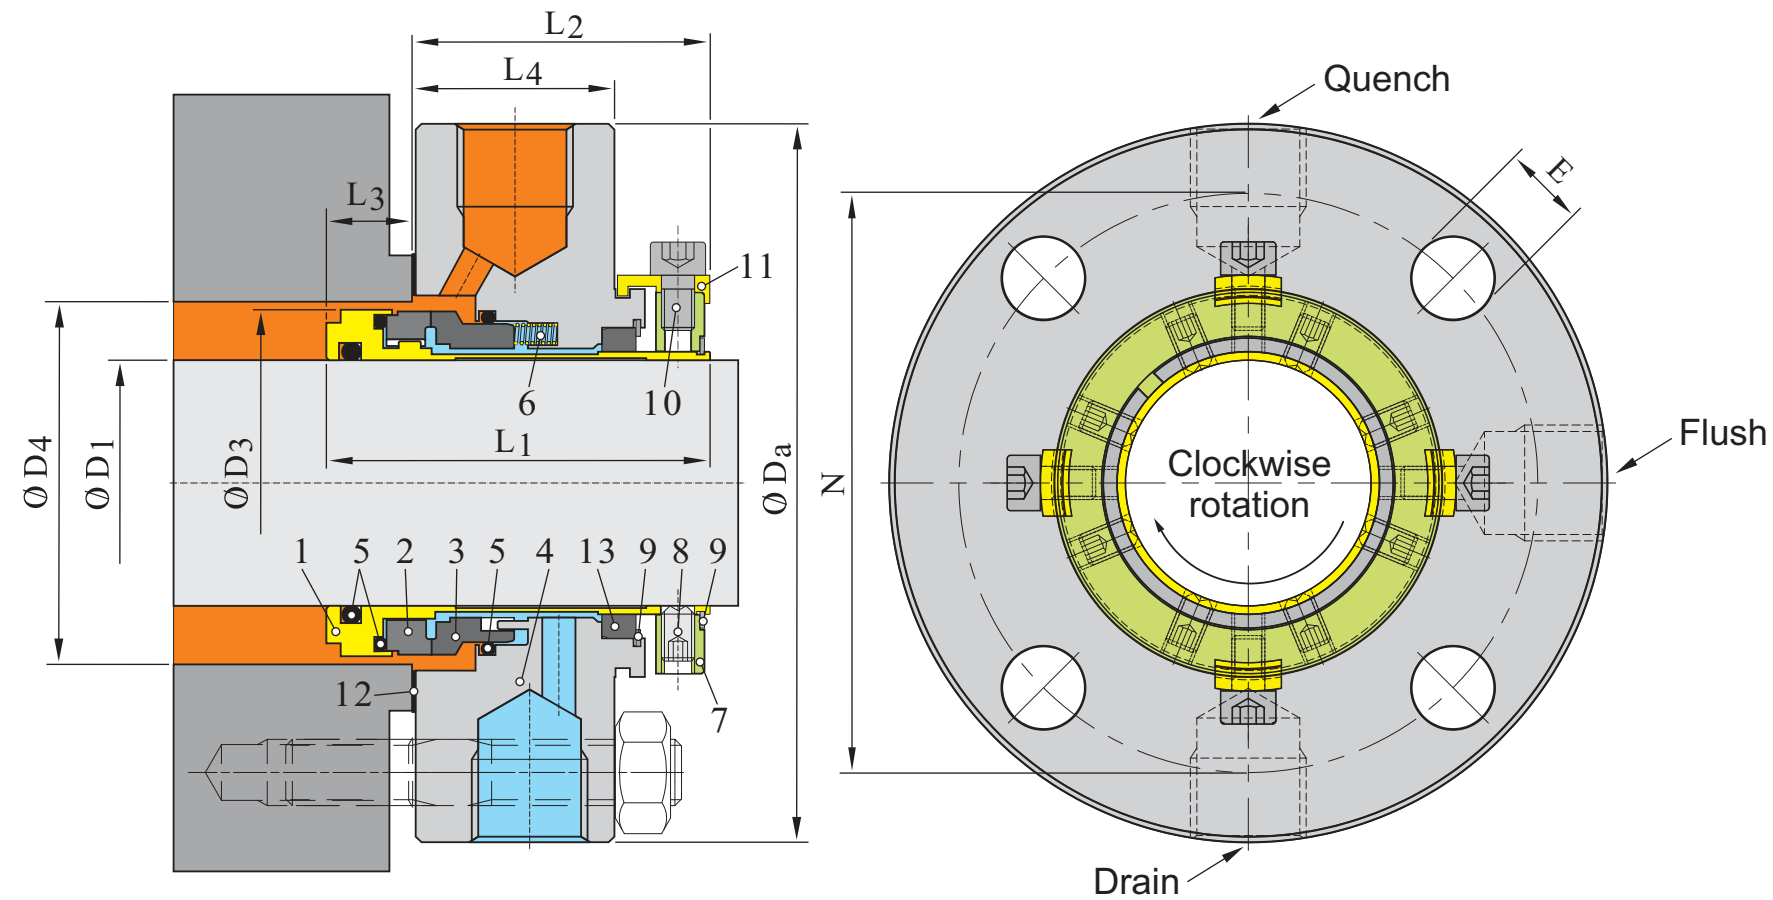

Type Sealtex 16D

Dimension Table (Inches)

D1	D3	D4 min.	D4 max.	ØDa	L1	L2	L3	L4	E	N
1.000	1.564	1.625	1.889	4.000	2.575	1.954	0.621	0.531	0.525	2.805
1.125	1.689	1.750	2.015	4.125	2.651	2.062	0.589	0.531	0.525	2.933
1.250	1.812	1.875	2.294	4.250	2.728	2.062	0.666	0.531	0.525	3.213
1.375	1.939	2.000	2.421	4.375	2.728	2.062	0.666	0.531	0.525	3.338
1.500	2.187	2.250	2.680	4.875	2.744	2.156	0.619	0.593	0.525	3.599
1.625	2.312	2.375	2.812	5.000	2.744	2.156	0.619	0.593	0.562	3.766
1.750	2.406	2.480	2.918	5.250	2.744	2.156	0.619	0.593	0.562	3.875
1.875	2.549	2.625	2.918	5.250	2.744	2.156	0.619	0.593	0.562	3.875
2.000	2.673	2.750	3.015	5.500	2.963	2.312	0.650	1.063	0.562	4.000
2.125	2.798	2.875	3.360	5.859	2.963	2.313	0.650	0.593	0.687	4.469
2.250	2.923	3.000	3.485	6.500	2.963	2.313	0.650	0.593	0.687	4.566
2.375	3.048	3.125	3.610	6.500	3.063	2.466	0.597	0.625	0.687	4.719
2.500	3.301	3.375	3.891	6.750	2.980	2.563	0.417	0.625	0.687	5.000
2.625	3.551	3.625	4.062	6.750	3.088	2.500	0.588	0.625	0.687	5.170
2.750	3.551	3.625	4.062	6.750	3.088	2.500	0.588	0.625	0.687	5.170
2.875	3.614	3.687	4.186	7.000	3.088	2.500	0.588	0.625	0.687	5.312
3.000	3.846	3.934	4.469	7.750	3.088	2.562	0.526	0.685	0.812	5.720
3.125	4.022	4.125	4.600	7.875	3.156	2.562	0.594	-	0.812	5.845
3.250	4.022	4.125	4.600	7.437	3.093	2.510	0.583	-	0.812	5.845
3.375	4.246	4.375	4.850	8.125	3.156	2.562	0.594	-	0.812	6.095
3.500	4.371	4.500	4.975	8.250	3.156	2.562	0.594	-	0.812	6.220
3.625	4.500	4.625	5.100	8.375	3.156	2.562	0.594	-	0.687	6.250
3.750	4.625	4.724	5.199	8.750	3.156	2.562	0.594	-	0.687	6.770
3.875	4.750	4.875	5.375	8.750	3.156	2.562	0.594	-	0.812	6.636
4.000	4.875	5.000	5.500	9.000	3.156	2.562	0.594	-	0.812	6.761
4.125	5.000	5.125	5.625	9.000	3.156	2.562	0.594	-	0.812	6.886
4.250	5.125	5.250	5.750	9.250	3.156	2.562	0.594	-	0.812	7.011
4.500	5.375	5.550	6.000	9.500	3.156	2.562	0.594	-	0.812	7.261
4.750	5.625	5.750	6.313	10.375	3.156	2.562	0.594	-	0.812	7.574
5.000	6.125	6.250	7.260	12.000	3.609	3.043	0.566	-	0.812	10.000
5.250	6.375	6.500	7.510	12.250	3.609	3.043	0.566	-	0.812	10.250
5.500	6.625	6.750	8.000	12.687	3.609	3.043	0.566	-	0.937	10.500